
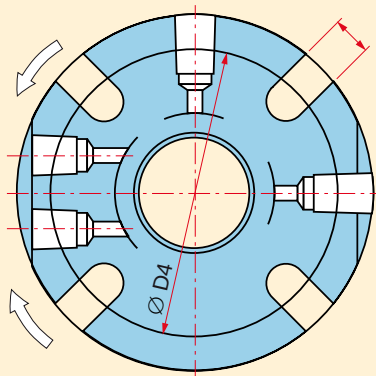


POWER[®] *seal* CD 20

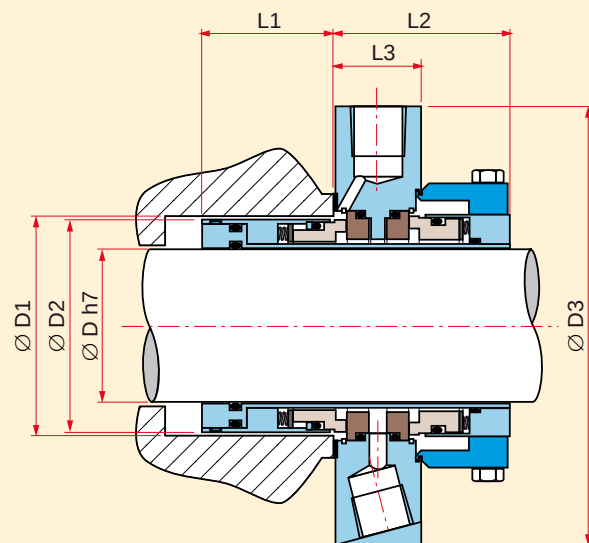

ø hřídele D		Ucpávková komora D1				D2		D3		L1		L2		L3		W		Rozteč šroubů a jejich velikost D4					
Inch	mm	Min.		Max.														3/8"	M10	1/2"	S/II 2	5/8"	M16
1.000	25	1.625	41.5	1.875	48	1.551	39.4	3.543	90	1.535	39	2.007	51	0.905	23	0.437	11.1	2.625	70				
1.125	28	1.750	44.5	2.000	51	1.696	43.1	3.858	98	1.535	39	2.007	51	0.905	23	0.437	11.1	2.875	73				
	30		46		54		44		108		39		51	23		11.1		76					
1.250	32	1.875	48	2.125	54	1.811	46	4.252	108	1.535	39	2.007	51	0.905	23	0.437	11.1	3.125	79				
1.375	35	2.000	51	2.250	58	1.937	49.2	4.252	108	1.535	39	2.007	51	0.905	23	0.437	11.1	3.250	80				
1.500	38	2.250	58	2.500	63	2.185	55.5	4.724	120	1.535	39	2.007	51	0.905	23	0.563	14.3	3.625	92				
	40		60		66		58		120		39		51	23		14.3		92		95			
1.625		2.375		2.625		2.311		4.724		1.535		2.007		0.905		0.563		3.625		3.750			
	42		62		68		60		120		39		51	23		14.3		92		95			
1.750	45	2.500	64	2.750	70	2.412	61.5	5.000	127	1.535	39	2.007	51	0.905	23	0.563	14.3	3.750	95	3.875	98		
1.875	48	2.625	67	2.875	73	2.562	65.1	5.118	127	1.535	39.5	2.007	51	0.905	23	0.563	14.3	4.000	100	4.125	104		
2.000	50	2.750	70	3.000	77	2.685	68.2	5.118	127	1.535	39.7	2.007	51	0.905	23	0.563	14.3	4.100	100	4.125	104		
2.125		2.875		3.125		2.795	71	5.906	150	1.535	39	2.007	51	0.905		0.689		4.125		4.250		4.375	
	55		75		82		73		150		44		51	23		17.5		105		108		112	
2.250		3.000		3.250		2.937		6.260		1.732		2.283		1.024		0.689		4.250		4.375		4.500	
2.375	60	3.250	83	3.500	90	3.185	80.9	6.378	162	1.732	44	2.283	58	1.024	26	0.689	17.5	4.375	112	4.500	115	4.625	118
2.500	63	3.375	86	3.625	92	3.311	84.1	6.496	165	1.732	44	2.283	58	1.024	26	0.689	17.5	4.500	115	4.625	118	4.750	121
2.625	65	3.500	90	3.750	95	3.437	87.3	7.008	164	1.732	44	2.283	58	1.024	26	0.689	17.5	4.625	118	4.750	121	4.875	124
2.750	70	3.750	95	4.062	102	3.626	92.1	7.756	178	1.732	49	2.283	66.4	1.024	39.5	0.689	17.5	4.750	121	4.875	124	5.000	127
2.875		4.000		4.312		3.877				1.968		2.637		1.181									
3.000	75	4.000	104	4.312	108	3.874	98.4			1.968	50	2.637	67	1.181	30								
3.125	80	4.250	109	4.562	115	4.125	104.8			1.968	50	2.637	67	1.181	30								
3.250		4.375		4.687		4.125				1.968		2.637		1.181									
3.375	85	4.500	114	4.812	122	4.375	111.1			1.968	50	2.637	67	1.181	30								
3.500	90	4.625	119	4.937	127	4.500	114.3			1.968	50	2.755	70	1.181	30								
3.625		4.750		5.062		4.625				1.968		2.755		1.181									
3.750	95	4.875	124	5.187	132	4.625	117.5			1.968	50	2.755	70	1.181	30								
3.875		5.000		5.312		4.875				1.968		1.889		1.181									

Velikosti nad průměr 70 mm
jsou dodávány na dotaz

Rozsah použití

Teplota:	-40 °C ~ +230 °C
Tlak:	25 bar
Rychlost:	25 m/sec

Materiálové složení

Kovové části:	SS 316L / Ti2 / Hastelloy C
Stacionární plochy:	SC / SiC / TC / CA
Rotační plochy:	SC / SiC / TC
O-kroužky:	EPDM / Viton / FEP / Kalrez