


# POWER<sup>®</sup>seal 19

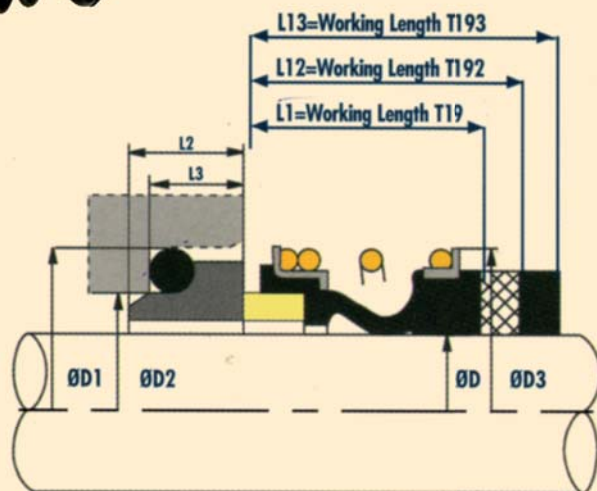

## Rozsah použití

Teplota: -40 °C ~ +200 °C

Tlak: 170 psi

Rychlost: 20 m/sec

## Materiálové složení

Rotační plocha: Carbon, Silicon Carbide, Tungsten Carbide,

Stacionární plocha: Ceramic, Silicon Carbide, Tungsten Carbide

Ostatní materiály na vyžádání.

| Ø hřídele D mm | D1    | D2    | D3    | L1   | L12  | L13  | L2   | L3   |
|----------------|-------|-------|-------|------|------|------|------|------|
| 10             | 19.2  | 15.5  | 20.0  | 14.5 | 25.9 | 33.4 | 9.0  | 6.6  |
| 12             | 21.6  | 17.5  | 24.0  | 15.0 | 25.9 | 33.4 | 8.0  | 5.6  |
| 14             | 24.6  | 20.5  | 28.0  | 17.0 | 28.4 | 33.4 | 8.0  | 5.6  |
| 15             | 24.6  | 20.5  | 28.0  | 17.0 | 28.4 | 33.4 | 9.0  | 6.6  |
| 16             | 28.0  | 22.0  | 28.0  | 17.0 | 28.4 | 33.4 | 10.0 | 7.5  |
| 18             | 30.0  | 24.0  | 31.0  | 19.5 | 30.0 | 37.5 | 10.5 | 8.0  |
| 20             | 35.0  | 29.5  | 36.0  | 21.5 | 30.0 | 37.5 | 10.0 | 7.5  |
| 22             | 35.0  | 29.5  | 36.0  | 21.5 | 30.0 | 37.5 | 10.0 | 7.5  |
| 24             | 38.0  | 32.0  | 40.5  | 22.5 | 32.5 | 42.5 | 10.0 | 7.5  |
| 25             | 38.0  | 32.0  | 41.0  | 23.0 | 32.5 | 42.5 | 10.0 | 7.5  |
| 28             | 42.0  | 36.0  | 47.0  | 26.5 | 35.0 | 42.5 | 11.5 | 9.0  |
| 30             | 45.0  | 39.2  | 47.0  | 26.5 | 35.0 | 42.5 | 13.0 | 10.5 |
| 32             | 48.0  | 44.2  | 51.0  | 27.5 | 35.0 | 47.5 | 13.0 | 10.5 |
| 33             | 50.0  | 42.2  | 51.0  | 27.5 | 35.0 | 47.5 | 13.5 | 11.0 |
| 35             | 52.0  | 46.2  | 55.0  | 28.5 | 35.0 | 47.5 | 13.5 | 11.0 |
| 38             | 55.0  | 49.2  | 58.0  | 30.0 | 36.0 | 46.0 | 13.0 | 10.3 |
| 40             | 58.0  | 52.2  | 60.0  | 30.0 | 36.0 | 46.0 | 13.5 | 10.8 |
| 43             | 62.0  | 53.3  | 63.0  | 30.0 | 36.0 | 51.0 | 14.5 | 12.0 |
| 45             | 64.0  | 55.3  | 65.0  | 30.0 | 36.0 | 51.0 | 14.5 | 11.6 |
| 48             | 68.4  | 59.7  | 69.0  | 30.5 | 36.0 | 51.0 | 14.5 | 11.6 |
| 50             | 69.3  | 60.8  | 71.0  | 30.5 | 38.0 | 50.5 | 14.5 | 11.6 |
| 53             | 72.3  | 63.8  | 76.0  | 33.0 | 36.5 | 59.0 | 15.0 | 12.3 |
| 55             | 75.4  | 66.5  | 78.0  | 35.0 | 36.5 | 59.0 | 16.0 | 13.3 |
| 58             | 78.4  | 69.5  | 82.0  | 37.0 | 41.5 | 59.0 | 16.0 | 13.3 |
| 60             | 80.4  | 71.5  | 85.0  | 38.0 | 41.5 | 59.0 | 16.0 | 13.3 |
| 65             | 85.4  | 76.5  | 90.0  | 40.0 | 41.5 | 69.0 | 16.0 | 13.0 |
| 68             | 91.5  | 82.7  | 94.0  | 40.0 | 41.5 | 68.7 | 16.0 | 13.7 |
| 70             | 92.0  | 83.0  | 97.0  | 40.0 | 48.7 | 68.7 | 16.0 | 13.0 |
| 75             | 99.0  | 90.2  | 102.0 | 40.0 | 48.0 | 68.7 | 17.0 | 14.0 |
| 80             | 104.0 | 95.2  | 108.0 | 40.0 | 48.0 | 78.0 | 18.0 | 15.0 |
| 85             | 109.0 | 100.2 | 117.0 | 41.0 | 46.0 | 76.0 | 18.0 | 14.8 |
| 90             | 114.0 | 105.2 | 126.0 | 45.0 | 51.0 | 76.0 | 18.0 | 14.8 |
| 95             | 120.3 | 111.6 | 131.0 | 46.0 | 51.0 | 76.0 | 19.0 | 15.8 |
| 100            | 123.3 | 114.5 | 131.0 | 47.0 | 51.0 | 76.0 | 19.0 | 15.8 |